
COST ESTIMATION REPORT

Filename: Eddy Plate.STEP

Generated: 10/8/2026, 11:33:38 AM

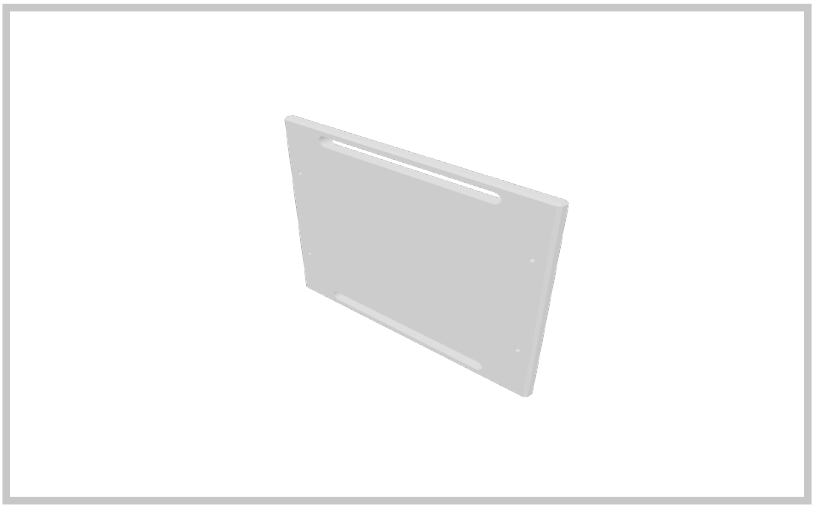

3D Model View

MODULE: Machining Module (Milling Process)	
MATERIAL DATA	
Material	Steel Alloy
Density	7890 kg/m³

FINAL COMPONENT ACTUAL DIMENSIONS	
Volume (mm³)	3750672
Mass	29.592800502 kg

BOUNDING BOX DIMENSIONS	
Length × Breadth × Height	480 mm × 425 mm × 20 mm

STOCK DIMENSIONS	
Volume (mm³)	6360000
Mass	50.1804 kg

RECOMMENDED BOUNDING BOX DIMENSIONS	
Length × Breadth × Height	530 mm × 480 mm × 25 mm

MANUFACTURING SETTINGS	
Machine Distribution	3 Axis (1000*800*500) - 70%
	4 Axis (1000*800*500) - 0%
	5 Axis (1000*800*500) - 30%
Quantity	1

COST SUMMARY	
Material Cost Per Unit	Rs.1,75,631.400
Machining Cost Per Unit	Rs.51,026.860
Total Material Cost For Given Quantity	Rs.1,75,631.400
Total Machining Cost For Given Quantity	Rs.51,026.859
OverAll Total Cost (Machining+Material cost)	Rs.2,26,658.259